

TRAILERS PRICE LIST

SINGLE AXLE TRAILERS

750 KG TRAILER

KG CAPACITY	750 KG
VOLUME	0,89m3
EMPTY WEIGHT	500KG
BOTTOM THICKNESS	2MM
SIDE THICKNESS	1,5MM
CASE BOX DIMENSION	130x230x30cm
EXTENSION	-
TYRE	195/65 16
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	



1000 KG TRAILER

KG CAPACITY	1000KG
VOLUME	1,79M3
EMPTY WEIGHT	600
BOTTOM THICKNESS	2mm
SIDE THICKNESS	1,5MM
CASE BOX DIMENSION	130x230x30cm
EXTENSION	30cm
TYRE	195/65 16
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	

1500 KG TRAILER

KG CAPACITY	1500 KG
VOLUME	2,25 M3
EMPTY WEIGHT	700 KG
BOTTOM THICKNESS	2mm
SIDE THICKNESS	1,5MM
CASE BOX DIMENSION	150x250x30cm
EXTENSION	30cm
TYRE	10,80/15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	



2000 KG TRAILER	
KG CAPACITY	2000 KG
VOLUME	2,8 M3
EMPTY WEIGT	800 KG
BOTTOM THICKNESS	2mm
SIDE THICKNESS	1,5MM
CASE BOX DIMENSION	160x250x40cm
EXTENSION	30cm
TYRE	10,80/15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



3 TONES TRAILER	
KG CAPACITY	3000 KG
VOLUME	3,52 M3
EMPTY WEIGT	950 KG
BOTTOM THICKNESS	2,5MM
SIDE THICKNESS	2MM
CASE BOX DIMENSION	180X280X40CM
EXTENSION	30CM
TYRE	10,80/15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

4 TONES TRAILER	
KG CAPACITY	4000 KG
VOLUME	4,2 M3
EMPTY WEIGT	1140 KG
BOTTOM THICKNESS	3MM
SIDE THICKNESS	2MM
CASE BOX DIMENSION	190X300X40CM
EXTENSION	30CM
TYRE	10/75-15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

5 TONES TRAILER

KG CAPACITY	5000 KG
VOLUME	5,15 M3
EMPTY WEIGT	1350 KG
BOTTOM THICKNESS	3MM
SIDE THICKNESS	2,5MM
CASE BOX DIMENSION	200X350X50CM
EXTENSION	30CM
TYRE	12,5/80X15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

6 TONES TRAILER

KG CAPACITY	6000 KG
VOLUME	5,8 M3
EMPTY WEIGT	1600 KG
BOTTOM THICKNESS	4MM
SIDE THICKNESS	2,5MM
CASE BOX DIMENSION	210x360x50 CM
EXTENSION	30CM
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE:	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

PRO MODEL

Please check the following pages to see model technical differences. Also please ask price for Pro model version.



TWO AXLE TRAILERS

4 TONES TRAILER

KG CAPACITY	4000 KG
VOLUME	7,2 M3
EMPTY WEIGT	1900 KG
UNDER CHASSIE	STEEL I FORM
TOP CHASSIE	NPU100
CASE BOX DIMENSION	200X400X50
EXTENSION	40CM
TYRE	900/16
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

5 TONES TRAILER

KG CAPACITY	5000 KG
VOLUME	9 M3
EMPTY WEIGT	2140 KG
UNDER CHASSIE	STEEL I FORM
TOP CHASSIE	NPU100
CASE BOX DIMENSION	200X450X60
EXTENSION	30CM
TYRE	11,5/80-15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

6 TONES TRAILER

KG CAPACITY	6000 KG
VOLUME	9,45 M3
EMPTY WEIGT	2550 KG
UNDER CHASSIE	STEEL I FORM
TOP CHASSIE	NPU 120
CASE BOX DIMENSION	210X450X60
EXTENSION	40CM
TYRE	12,5/80-15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

8 TONES TRAILER

KG CAPACITY	8000 KG
VOLUME	10,08 M3
EMPTY WEIGT	2750 KG
UNDER CHASSIE	STEEL I FORM
TOP CHASSIE	NPU140
CASE BOX DIMENSION	210X480X60
EXTENSION	40CM
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

10 TONES TRAILER

KG CAPACITY	10000 KG
VOLUME	10,5 M3
EMPTY WEIGT	2850 KG
UNDER CHASSIE	STEEL I FORM
TOP CHASSIE	NPU120
CASE BOX DIMENSION	210X500X60
EXTENSION	40CM
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

TANDEM AXLE TRAILERS

8 TONES TANDEM TRAILER

KG CAPACITY	8000 KG
VOLUME	11,47 M3
EMPTY WEIGT	2350KG
UNDER CHASSIE	NPU180
TOP CHASSIE	NPU120
CASE BOX DIMENSION	210X420X50CM
EXTENSION	40CM+40CM
TYRE	12,5/80-15,3
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

10 TONES TANDEM TRAILER

KG CAPACITY	10000 KG
VOLUME	13,86 M3
EMPTY WEIGT	2700KG
UNDER CHASSIE	NPU200
TOP CHASSIE	NPU120
CASE BOX DIMENSION	220X450X60CM
EXTENSION	40CM+40CM
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

12 TONES TANDEM TRAILER

KG CAPACITY	12000 KG
VOLUME	14,78 M3
EMPTY WEIGT	2800KG
UNDER CHASSIE	NPU200
TOP CHASSIE	NPU140
CASE BOX DIMENSION	220X480X60CM
EXTENSION	40CM+40CM
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

10 TONS POOL TYPE (CARRIER) TRAILERS

KG CAPACITY	10000 KG
VOLUME	11,88 M3
EMPTY WEIGT	2800KG
UNDER CHASSIE	NPU200
TOP CHASSIE	NPU140
CASE BOX DIMENSION	220X450X120CM
EXTENSION	
TYRE	400/60-15,5
PRICE	9000EURO
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	PARABOLIC 2 FLOOR
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

12 TONS POOL TYPE (CARRIER) TRAILERS

KG CAPACITY	12000 KG
VOLUME	15,84 M3
EMPTY WEIGT	3000 KG
UNDER CHASSIE	NPU200
TOP CHASSIE	NPU140
CASE BOX DIMENSION	220X450X160CM
EXTENSION	
TYRE	400/60-15,5
PRICE	
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	PARABOLIC 2 FLOOR
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	



tanagro

15 TONS POOL TYPE (CARRIER) TRAILERS

KG CAPACITY	15000 KG
VOLUME	17,82 M3
EMPTY WEIGT	3300KG
UNDER CHASSIE	NPU200
TOP CHASSIE	NPU140
CASE BOX DIMENSION	220X450X120CM
EXTENSION	
TYRE	400/60-15,5
PRICE	10000 EURO
HYDROLIC BRAKE:	
AIR BRAKE FOR 1 AXLE	
THREE SIDE TIPPING	
MECANIC SPRING	PARABOLIC 3 FLOOR
ITHAL HINGLE	
TWO WAY SIDE OPEN	
PLASTIC COVER	








tanagro

BALE TRAILER

DIMENSION:	240X800--	PRICE:	8000
BOTTOM THICKNESS:	3mm	HID.BRAKE	96
WALL THICKNESS:	-	AIR BRAKE:	240
TYRE:	400/60X15,5		

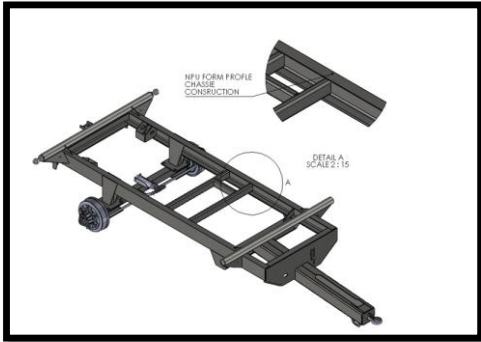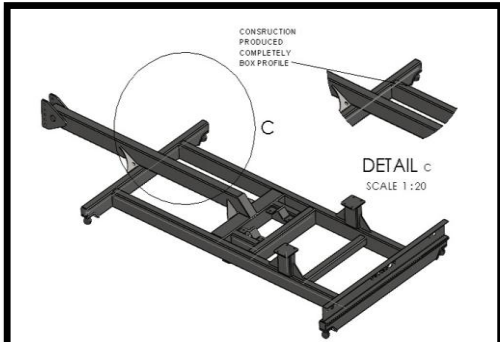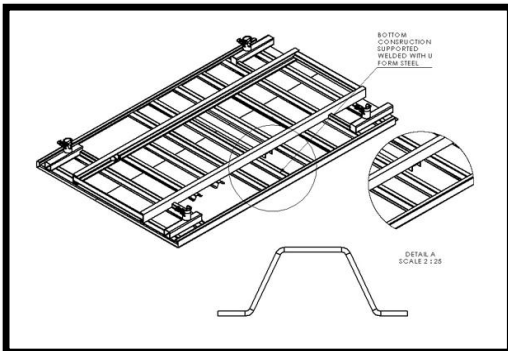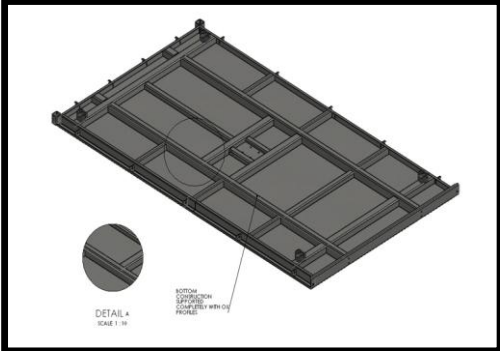

DIFFERENCE BETWEEN PRO AND BASIC MODEL			
BASIC MODEL CHASSIE		PRO MODEL CHASSIE	
			
Basic model chassie produced by NPU profile construction		Pro model chassie produced by complete profile construction	
BASIC MODEL BOTTOM		PRO MODEL BOTTOM	
			
Basic model bottom construction supported by U form steel plate		Pro model bottom construction supported by box profiles	
BASIC MODEL SIDEWALLS WORKING		PRO MODEL SIDEWALLS WORKING	
		 down way	 up way
Opening just down way same as photo		Opening down and up way direction	
BASIC MODEL SIDEWALLS LOCKING		PRO MODEL SIDEWALLS WORKING	
	LOCKING STANDART IS PIN LOCKING		LOCKING STANDART IS EU HANDLE

STANDARTS AND OPTIONS
SIDEWALL AND EXTENTION LOCKING TYPES

STANDART FOR BASIC MODEL TRAILER



EXPLANING

Sidewall and extention locking standart pin


STANDART FOR PRO MODEL



EXPLANING

Sidewall and extention locking eu (sourced) handle

OPTION FOR BASIC MODEL TRAILER

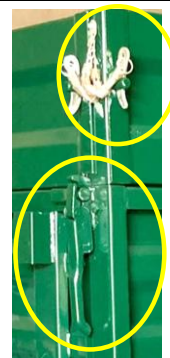

EXPLANING

Sidewall locking with eu handle extention locking standart pin

SUSPENSION			
STANDART FOR SINLGE AXLE ALL TYPE TRAILER	OPTION FOR SINLGE AXLE ALL TYPE TRAILER		OPTION FOR ALL TWO AXLE TRAILER



EXPLANING

Not available spring



EXPLANING

Available spring



EXPLANING

Standart for all two axle trailers

BRAKE MODEL					
OVERRUN (MECHANIC) BRAKE OPTION	HDYRUALIC BRAKE OPTION	AIR BRAKE OPTION	AIR BRAKE TWO TUBE OPTION	COMBINE BRAKE OPTION	HAND BRAKE (PARKING BRAKE)
OPTION	OPTION	OPTION	OPTION	OPTION	OPTION
Must be for R2a registration needed trailer on EU zone	-	Must be for R3a registration needed single axle trailer between 3000 kg - 20.000 kg on EU zone	Must be for R3a registration needed single axle double between 3000 kg - 20.000 kg on EU zone	If registration must be with hydrualic stystem we need to use this combine tube.It is working with air and hdyrualic.On registrationair selection must be using, than hydrualic can use on normal using times	-

LIGHTING OPTIONS

LIGHTING TYPE 1



* TRIANGLE REFLECTOR: 1PCS

* DOCH STOP LIGHT: 1 PCS

* 10CM X 4 PCS STICK REFLECTOR



LIGHTING TYPE 2



* TRIANGLE REFLECTOR: 1PCS

* DOCH STOP LIGHTS: 1 SET

* 4 PCS AMBER REFLECTOR WITHOUT LAMPS
2PCS RIGHT SIDE / 2 PCS LEFT SIDE STICKED



* 2 PCS WHITE REFLECTOR FRONT SIDE



LIGHTING TYPE 3



*TRIANGLE REFLECTOR : 1PCS

*HOMOLIGATED REAR LIGHTS- DASTERI CODE: 06021 - LIWOF CODE: 23163

*HOMOLIGATED PLATE LAMPS-SANEL CODE: 1986 - LIWOF CODE: 22153

* 2 PCS RIGHT / 2 PCS LEFT SIDE AMBER REFLECTOR



*2PCS WHITE COLOR REFLECTOR FRONT SIDE



LIGHTING TYPE 4



*TIRANGLE REFLECTOR: 1 PCS

*HOMOLIGATED REAR STOP LIGHTS - DASTERI CODE: 06021 - LIWOF CODE: 23163 SET

*HOMOLIGATED PLATE LIGHT-SANEL CODE: 1986 - LIWOF CODE: 22153 - 1PCS RIGHT / 1PCS LEFT SIDE

*HOMOLIGATED AND LAMP INCLUDING REFLECTOR AMBER COLOR

*UNTIL 3MT TRAILER LENTH 2 PCS

*BIGER THAN 3MT TRAILER LENT 3PCS



*HOMOLIGATED AND LAMP INCLUDING REFLECTOR WHITE COLOR

*FRONT SIDE 2 PCS



MIXER VAGON PRICE LIST

1,5 M3 MIXER VAGON

Volume	1,5 m ³
Length (mm)	1800
Height (mm)	1900
width (mm)	1300
Empty weight (kg)	700
Max. loading capacity (kg)	400
Max. gross weight (kg)	1100
Bottom thickness (mm)	8
Sidewall thickness (mm)	3
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	400
Door height (mm)	500
Discharge height (mm)	580
PTO speed	540
Min. PTO horsepower	15
Standard tires	NO
Oil tank	OPTIONAL
Ladder with stand	NO
Rubber side extension	NO
Over flow ring	STANDARD
Discharge conveyor	NO
Loading bucket	NO
Weighing system	NO



OPTION	PRICE EURO
1.5 M3 STANDART MIXER VAGON	
7,5 KW ELEKTRIC MOTOR	

2,5 M3 MIXER VAGON

Volume	2.5 m ³
Length (mm)	4000
Height (mm)	1870
width (mm)	1380
Empty weight (kg)	800
Max. loading capacity (kg)	+500
Max. gross weight (kg)	1300
Bottom thickness (mm)	8
Sidewall thickness (mm)	3
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	580
Door height (mm)	606
Discharge height (mm)	520
PTO speed	540
Min. PTO horsepower (Hp)	10
Standard tires	175 x 70 x 13
Oil tank	OPTIONAL
Ladder with stand	YES
Over flow ring	NO
Loading bucket	



OPTION	PRICE EURO
2,5M3 ECO MODEL TRAILER	
TYPE MIXER VAGON	
LOADER	
OIL PUMP GROUP	
SCALE	
CONVEYOR BELT	

3 M3 MIXER VAGON

Volume	3 m ³
Length (mm)	4300
Height (mm)	2400
width (mm)	1900
Empty weight (kg)	1250
Max. loading capacity (kg)	800
Max. gross weight (kg)	2050
Bottom thickness (mm)	10
Sidewall thickness (mm)	3
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	400
Door height (mm)	500
Discharge height (mm)	600
PTO speed	540
Min. PTO horsepower	40
Standard tires	10 x 80 x 12
Oil tank	OPTIONAL
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
3M3 ECO MODEL TRAILER TYPE MIXER VAGON	
OIL PUMP GROUP	
CONVEYOR	
SCALE	

4 M3 MIXER VAGON

Volume	4 m ³
Length (mm)	4300
Height (mm)	2400
width (mm)	1900
Empty weight (kg)	1500
Max. loading capacity (kg)	800
Max. gross weight (kg)	2300
Bottom thickness (mm)	10
Sidewall thickness (mm)	3
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	400
Door height (mm)	500
Discharge height (mm)	600
PTO speed	540
Min. PTO horsepower	40
Standard tires	10 x 80 x 12
Oil tank	OPTIONAL
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
4 M3 TRAILER TYPE MIXER VAGON (WITH LOADER)	
OIL PUMP GROUP	
CONVEYOR	
CONVEYOR FOR DOUBLE SIDE	
SCALE	

5 M3 MIXER VAGON

Volume	5 m ³
Length (mm)	4700
Height (mm)	2400
width (mm)	2300
Empty weight (kg)	2700
Max. loading capacity (kg)	1500
Max. gross weight (kg)	4200
Bottom thickness (mm)	15
Sidewall thickness (mm)	5
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	540
Door height (mm)	600
Discharge height (mm)	700
PTO speed	540
Min. PTO horsepower	60
Standard tires	100 x 75 x 15,3
Oil tank	OPTIONAL
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
5 M3 TRAILER TYPE MIXER VAGON (WITH LOADER)	
OIL PUMP GROUP	
CONVEYOR	
CONVEYOR 2 SIDE	
SCALE	

6 M3 MIXER VAGON

Volume	6 m ³
Length (mm)	4440
Height (mm)	2750
width (mm)	2380
Empty weight (kg)	3000
Max. loading capacity (kg)	1800
Max. gross weight (kg)	4800
Bottom thickness (mm)	15
Sidewall thickness (mm)	5
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	400
Door height (mm)	540
Discharge height (mm)	720
PTO speed	540
Min. PTO horsepower	60
Standard tires	100 x 80 x 15,3
Oil tank	NO
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
6 M3 TRAILER TYPE MIXER VAGON (WITH LOADER)	
OIL PUMP GROUP	
CONVEYOR	
CONVEYOR 2 SIDE	
SCALE	

8 M3 MIXER VAGON

Volume	8 m ³
Length (mm)	5900
Height (mm)	2900
width (mm)	2900
Empty weight (kg)	3400
Max. loading capacity (kg)	3200
Max. gross weight (kg)	6600
Bottom thickness (mm)	20
Sidewall thickness (mm)	6
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	600
Door height (mm)	650
Discharge height (mm)	720
PTO speed	540
Min. PTO horsepower	70
Standard tires	400 x 60 x 15,5
Oil tank	OPTIONAL
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
8 M3 TRAILER TYPE MIXER VAGON (WITH LOADER)	
OIL PUMP GROUP	
CONVEYOR	
CONVEYOR FOR DOUBLE SIDE	
SCALE	

10m3 MIXER VAGON




Volume	10 m ³
Length (mm)	6200
Height (mm)	2900
width (mm)	3000
Empty weight (kg)	4000
Max. loading capacity (kg)	3800
Max. gross weight (kg)	7800
Bottom thickness (mm)	20
Sidewall thickness (mm)	6
No. of augers	1
No. of fixed knives	5
Counter cutters	2
Auger speed (rpm)	54
Door opening width (mm)	600
Door height (mm)	650
Discharge height (mm)	760
PTO speed	540
Min. PTO horsepower	80
Standard tires	400 x 60 x 15,5
Oil tank	OPTIONAL
Ladder with stand	STANDARD
Rubber side extension	STANDARD
Over flow ring	NO
Discharge conveyor	OPTIONAL
Loading bucket	STANDARD
Weighing system	OPTIONAL



OPTION	PRICE EURO
10 M3 TRAILER TYPE MIXER VAGON (WITH LOADER)	
OIL PUMP GROUP	
CONVEYOR	
CONVEYOR FOR DOUBLE SIDE	
SCALE	

2024 YEAR PRODUCT

CRANE-1200 KG



1100 EURO

LOADERS-LEVELERS

PRO LOADER



WIDHT	140CM
LENTH	152CM
HEIGHT	215CM
LOADER	
WIDHT	150CM
MAX.LOADING	
HEIGHT	440CM
UNLOADING	340CM
NEEDED HP	70-90
WIEGHT	515 KG
PRICE 130cm	
PRICE 150cm	
PRICE 170cm	

BASIC LOADER 80CM



LEVELER 6MM



PRO BASKET



DIMENSIONS	PRICE
160x110x50 cm	
180x110x50cm	
200x110x50cm	
* 50CM EXTENTION	